

PLUG-IN → MULTIDECKS

Medium RDME-10

DVO | DDS | BDA



STANDARD FEATURES




- working temperature for BDA: from 2°C to 4°C; for DVO/DDS: from 0°C to 2°C
- refrigerant: R290
- natural defrosting
- automatic evaporation of condensate
- electronic controller with temperature indicator
- exposition: zinc-plated steel, powder coated in white (RAL 9003)
- 4 rows of suspended shelves, on shelves and on air inlet price holders 39 mm
- perspex shelf riser for BDA
- lighting: top, LEDit, NW-4
- color of the base black (RAL 9005)
- mechanical night blind for version BDA

OPTIONS

- sidewalls

Medium RDME-10 2500 DVO

DVO – door | double, straight (High Vision) | hinged
 DDS – door | double, straight | sliding (sideways)
 BDA – front glass riser | double, straight | fixed

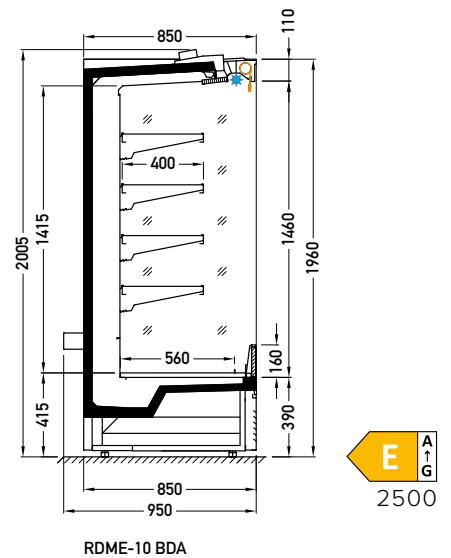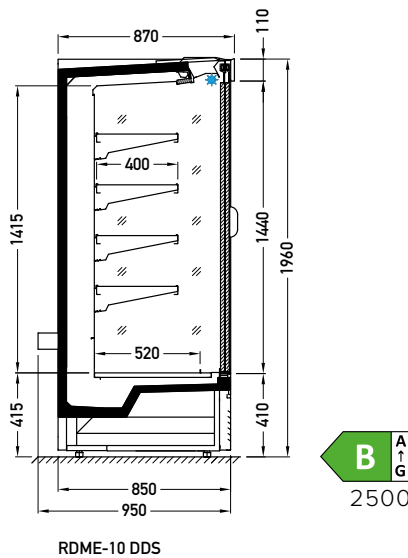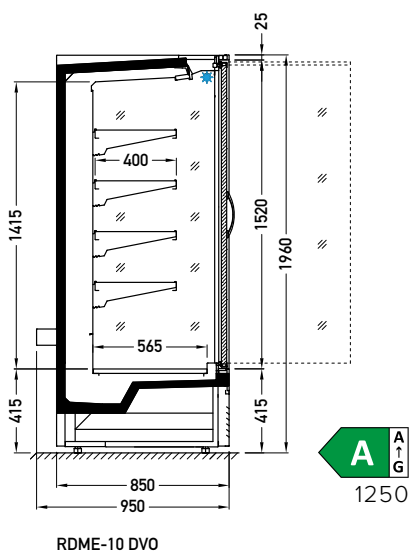

AVAILABLE MODULES

1250 1875 2500

JBG-2 Sp. z o.o. reserves the right to change the standards of devices or to withdraw products without prior notice.

Designation of the energy efficiency class is dedicated to a particular products, which are presented on each page of the catalogue. Indicated energy efficiency class depends on a module type, equipment, glassing version and type of a refrigerant. Amendment of each of the said parameters may cause amendment of the energy efficiency class. Contact the producer to acknowledge the energy efficiency class for the product with different parameters to those presented in the catalogue.